


S98D15F-10W

Product Information

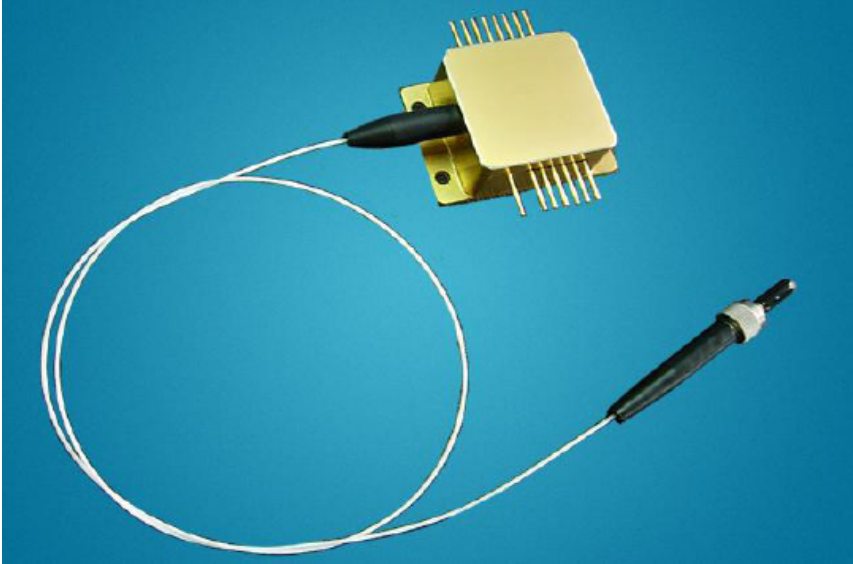

Key Features:

- ◆ 10W output power
- ◆ 105 μ m or 200 μ m fiber core diameter
- ◆ 0.22NA
- ◆ 976nm wavelength
- ◆ 650nm aiming beam

Applications:

- ◆ Medical use
- ◆ Material processing



Sintec Optronics Technology Pte Ltd

10 Bukit Batok Crescent #07-02

The Spire, Singapore 658079

Tel: +65 63167112 Fax: +65 63167113

E-mail: sales@SintceOptronics.com or sales@sintec.sg

URL: <http://www.SintecOptronics.com> or <http://www.sintec.sg>

976nm Single Fiber Output Dual-Wavelength Diode Lasers

Specifications (25°C)		Symbol	Unit	K98D15F-10.00W
Optical data	CW-output power	P_o	W	10
	Center wavelength	λ_c	nm	976
	Tolerance of λ	-	nm	$\pm 3, \pm 10$
	Spectral width (FWHM)	$\Delta\lambda$	nm	<3
	Temperature drift of λ	-	nm/°C	~0.3
Fiber data ⁽¹⁾	Fiber core diameter	W_c	μm	105, 200
	Numerical aperture	NA	-	0.22
	Fiber connector	-	-	SMA-905
Electrical data	Operation current	I_{op}	A	12
	Threshold current	I_{th}	A	0.5
	Conversion efficiency	η	%	35~45
	Slope efficiency	η_D	W/A	0.8~1.0
	Operation voltage	V_{op}	V	1.9
	Reverse voltage	V_{re}	V	2
PD data	Current	I_{mo}	mA	0.20~2.00
TEC data	Max. current	I_t	A	6.0
	Max. voltage	V_t	V	9.8
Thermistor data ⁽²⁾	Thermistor	R_t	(K Ω)/ β (25°C)	10 \pm 5%/3477
Aiming beam data	Output power	P_a	mW	>2
	Wavelength	λ_a	nm	650 \pm 10
	Voltage	V_a	V	2.2 ⁽³⁾
	Current	I_a	mA	<30
Others	Operation temperature	T_{op}	°C	10~30
	Storage temperature	T_{st}	°C	-20~80
	Lifetime	MTBF	h	>10,000
	Dimensions (fiber and connector not included)	-	mm	44.5 \times 31.8 \times 18.0
	Lead soldering temperature	T_{is}	°C	260(10 sec.)

(1) Other fibers available.


(2) $R_t = R_0 \cdot \exp(\beta(1/T - 1/T_0))$, ($T_0 = 25^\circ\text{C} = 298\text{K}$).

(3) Optional 5V DC input.


Sintec Optronics Technology Pte Ltd
 10 Bukit Batok Crescent #07-02 The Spire Singapore 658079
 Tel: +65 63167112 Fax: +65 63167113
 E-mail: sales@SintecOptronics.com or sales@sintec.sg
 URL: <http://www.SintecOptronics.com> or <http://www.sintec.sg>

976nm Single Fiber Output Dual-Wavelength Diode Lasers

Characteristics

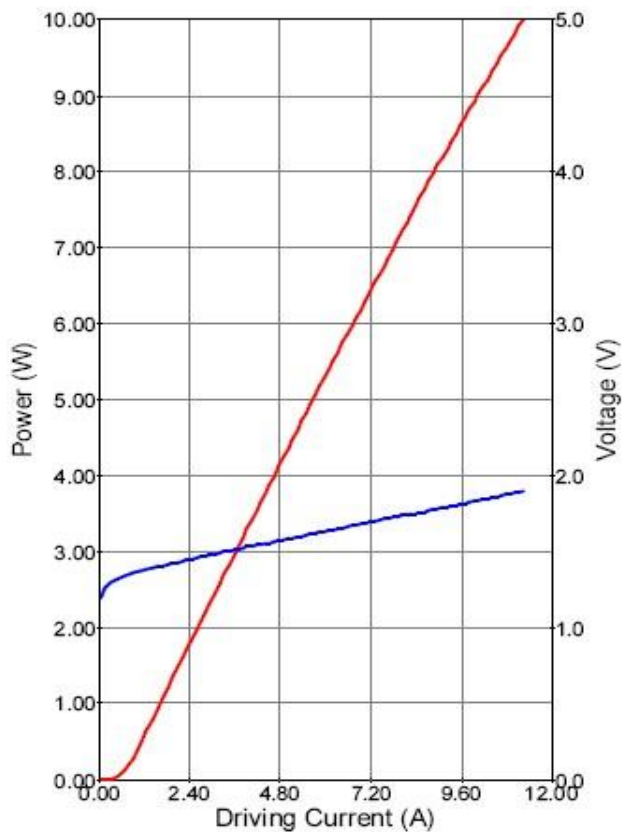


Typ. spectrum (T=25°C)

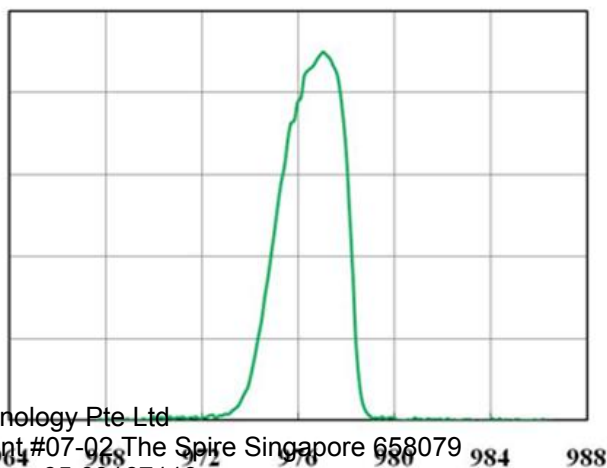

Sintec Optronics Technology Pte Ltd
10 Bukit Batok Crescent #07-02, The Spire Singapore 658079
Tel: +65 63167112 Fax: +65 63167113
E-mail: sales@SintecOptronics.com or sales@sintec.com.sg
URL: <http://www.SintecOptronics.com> or <http://www.sintec.sg>

976nm Single Fiber Output Dual-Wavelength Diode Lasers

Package Dimensions (mm)

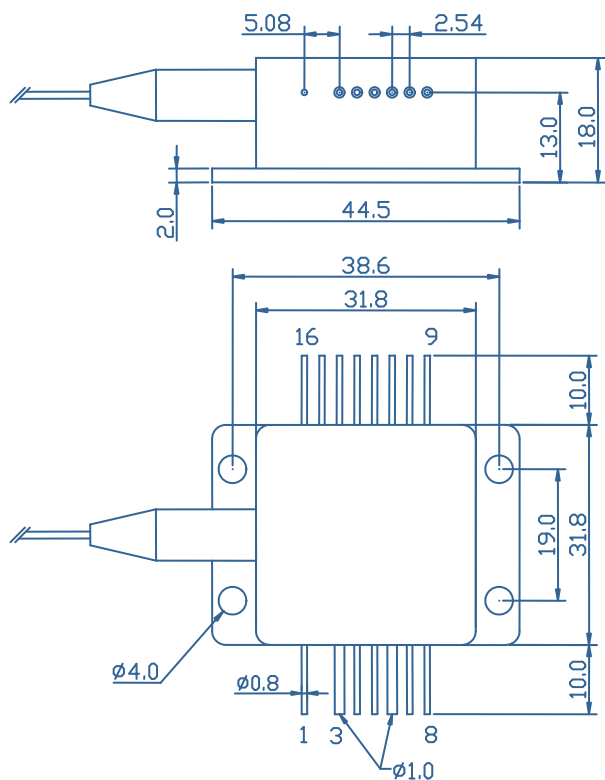

Pin	Function	Pin	Function
1	Case	9	TEC (-)
2	-	10	None
3	LD (+)	11	None
4	Thermistor	12	None
5	Thermistor	13	None
6	LD (-)	14	Aiming Beam LD (+)
7	PD (P)	15	Aiming Beam LD (-)
8	PD (N)	16	TEC (+)

OPERATING NOTES

- Avoid eye exposure to direct or scattered radiation.
- ESD precautions must be taken.
- Please connect pins to wires by solder instead of using socket when operation current is higher than 6A. Soldering point should be close to the root of the pins. Soldering temperature should be lower than 260°C and time shorter than 10 second.
- Use constant current power supply. Avoid surge current.
- Laser diode must be used according to the specifications.
- Laser diode must work with good cooling.
- A minimum bend diameter should be 300 times greater than the fiber diameter.
- Operation temperature is 10°C~ 30°C.
- Storage: -20°C~ +80°C, all pins short-circuit.

Sintec Optronics Technology Pte Ltd
 10 Bukit Batok Crescent #07-02 The Spire Singapore 658079
 Tel: +65 63167112 Fax: +65 63167113
 E-mail: sales@SintecOptronics.com or sales@sintec.sg
 URL: <http://www.SintecOptronics.com> or <http://www.sintec.sg>

