


S98S02M-10W S98S02M-15W

Product Information

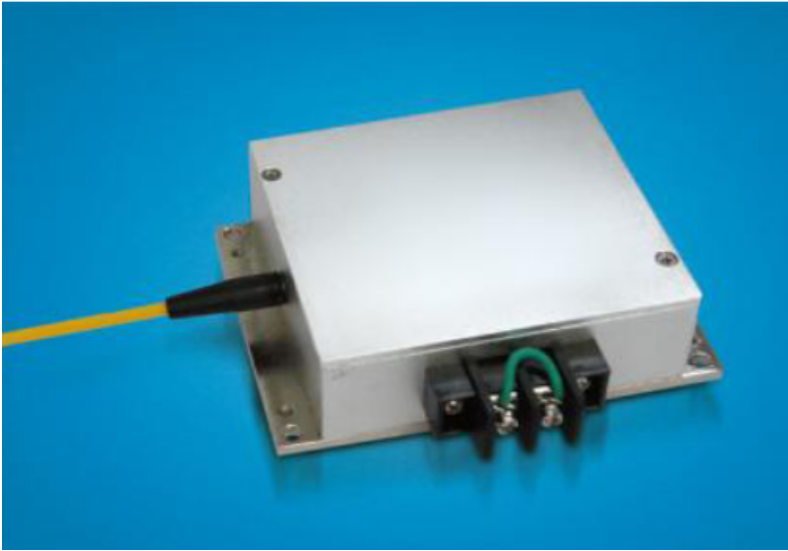

Key Features:

- ◆ 10W,15W output power
- ◆ 375 μ m fiber bundle diameter
- ◆ 0.22NA
- ◆ 976nm wavelength
- ◆ 650nm aiming beam optional
- ◆ Single 400 μ m core fiber output (optional)

Applications:

- ◆ Laser pumping
- ◆ Medical use
- ◆ Illumination
- ◆ Material processing



Sintec Optronics Technology Pte Ltd

10 Bukit Batok Crescent #07-02

The Spire, Singapore 658079

Tel: +65 63167112 Fax: +65 63167113

E-mail: sales@SintceOptronics.com or sales@sintec.sg

URL: <http://www.SintecOptronics.com> or <http://www.sintec.sg>

976nm High Power Fiber Bundled Diode Lasers

Specifications (25°C)		Symbol	Unit	K98D06M-10.00W	K98D06M-15.00W
Optical data	CW-output power ⁽¹⁾	P_o	W	10	15
	Center wavelength	λ_c	nm	976	
	Tolerance of λ	-	nm	± 10	
	Temperature drift of λ	-	nm/°C	~0.3	
Fiber data ⁽²⁾	Fiber core diameter	W_c	μm	375	
	Numerical aperture	NA	-	0.22	
	Fiber connector	-	-	SMA-905	
Electrical data	Operation current	I_{op}	A	3.6	3.8
	Threshold current	I_{th}	A	0.3	
	Conversion efficiency	η	%	40	
	Slope efficiency	η_D	W/A	2.9	4.7
	Operation voltage	V_{op}	V	~6.0	~10.0
	Reverse voltage	V_{re}	V	~6.0	~10.0
Others	Operation temperature	T_{op}	°C	10~30	
	Storage temperature	T_{st}	°C	-20~+80	
	Lifetime	MTBF	h	>10,000	
	Dimensions (fiber and connector not included)	-	mm	123×80×25	
	Weight	-	g	~600	



(1) All LDs inside are connected in serial.

(2) Other fibers available.


Sintec Optronics Technology Pte Ltd
 10 Bukit Batok Crescent #07-02 The Spire Singapore 658079
 Tel: +65 63167112 Fax: +65 63167113
 E-mail: sales@SintecOptronics.com or sales@sintec.sg
 URL: <http://www.SintecOptronics.com> or <http://www.sintec.sg>

976nm High Power Fiber Bundled Diode Lasers

Characteristics

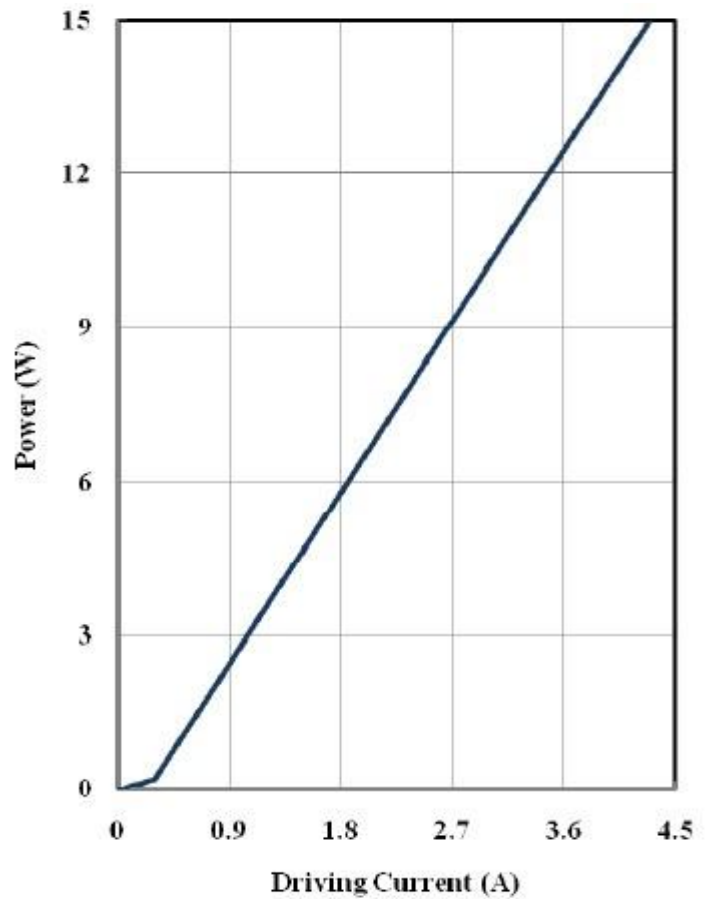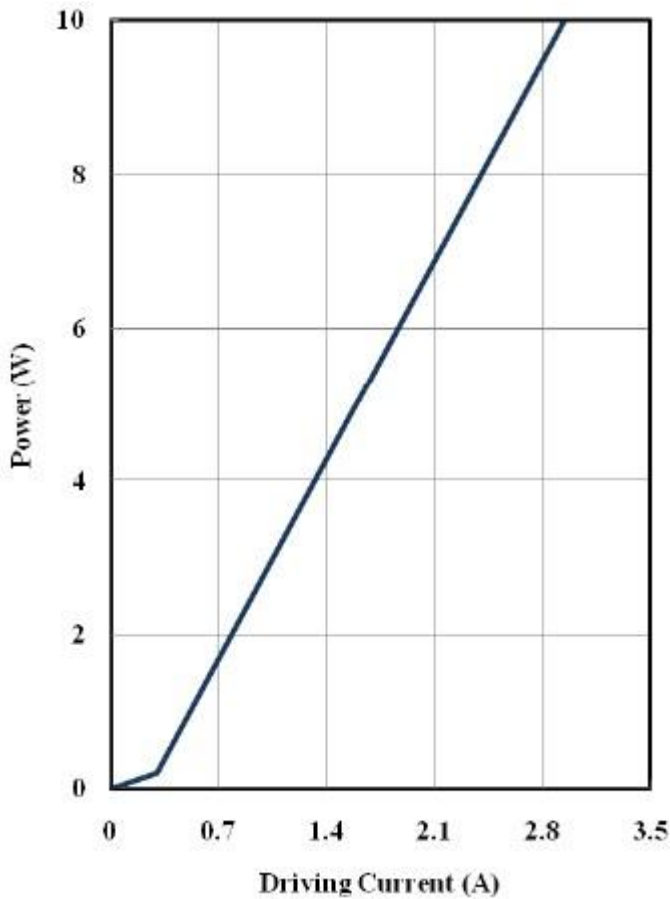

Typ. Spectrum (T=25°C)

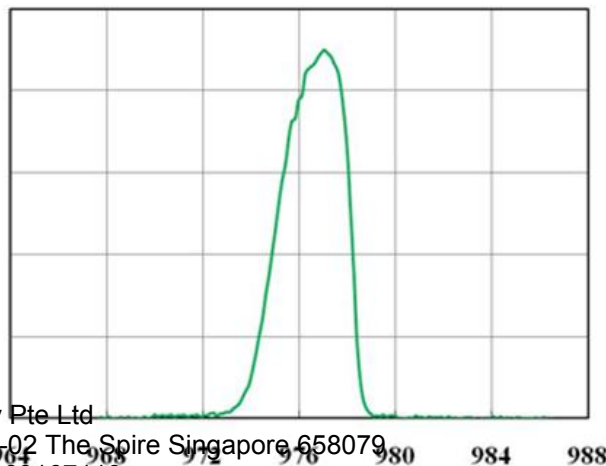


Sintec Optronics Technology Pte Ltd
10 Bukit Batok Crescent #07-02 The Spire Singapore 658079
Tel: +65 63167112 Fax: +65 63167113
E-mail: sales@SintecOptronics.com or sales@sintec.sg
URL: <http://www.SintecOptronics.com> or <http://www.sintec.sg>

Wavelength (nm)

976nm High Power Fiber Bundled Diode Lasers

Package Dimensions (mm)

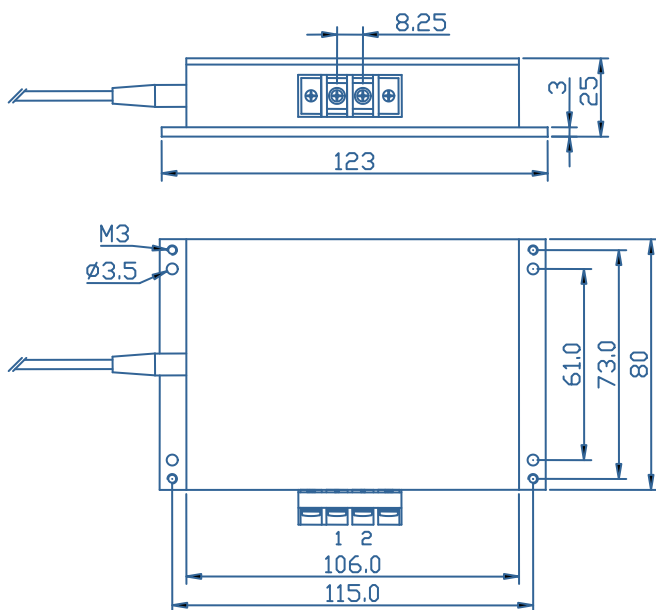

Pin	Function
1	LD (+)
2	LD (-)

OPERATING NOTES

- Avoid eye exposure to direct or scattered radiation.
- ESD precautions must be taken.
- Use constant current power supply. Avoid surge current.
- Laser diode must be used according to the specifications.
- Laser diode must work with good cooling.
- A minimum bend diameter should be 300 times greater than the fiber diameter.
- Operation temperature is 10°C~ 30°C.
- Storage: -20°C~ +80°C, all pins short-circuit.

Sintec Optronics Technology Pte Ltd
10 Bukit Batok Crescent #07-02 The Spire Singapore 658079
Tel: +65 63167112 Fax: +65 63167113
E-mail: sales@SintecOptronics.com or sales@sintec.sg
URL: <http://www.SintecOptronics.com> or <http://www.sintec.sg>

